


## Fuel Filter EMI 3000

Fuel Filter With A Change Interval Of 3,000 Hours

A spring covered with plastic to reduce electrolysis and corrosion inside the filter

Tube for water return to the fuel tank allows to avoid the risk of water entering into the high-pressure fuel pump and injection system

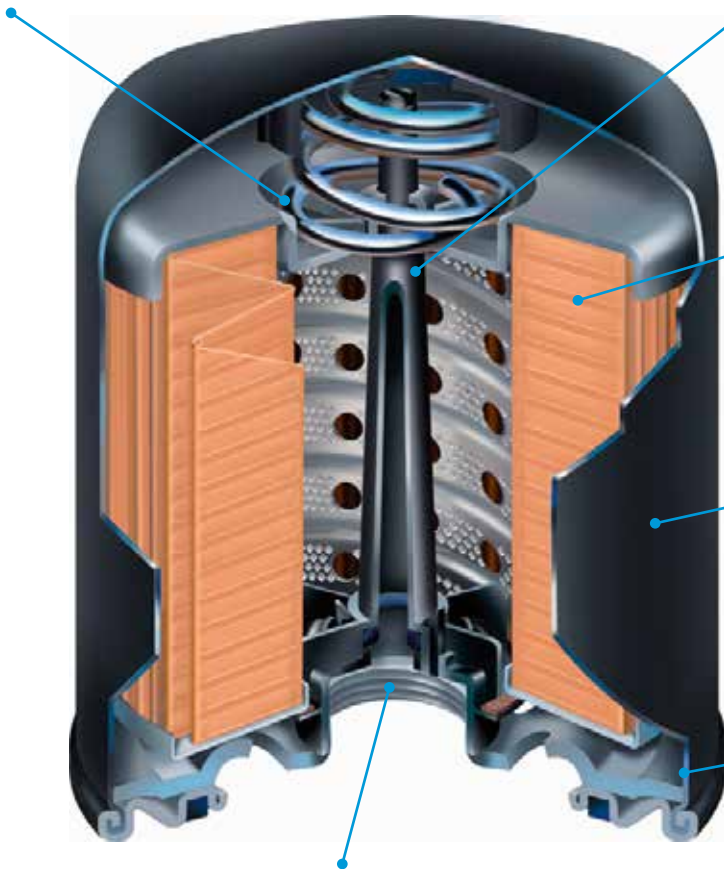

Fiberglass/cellulose filler for separation of water and solid particles

The filter housing is coated with epoxy paint to prevent corrosion

Double bend for leakage prevention

A reliable gasket integrated according to the technical requirements of Thermo King to ensure highly efficient sealing between the filter and the mounting head, thus preventing fuel leaks

## CHOOSE ORIGINAL SPARE PARTS



**THE RISK OF A SERIOUS BREAKDOWN IS MUCH HIGHER THAN THE SAVINGS COMING FROM THE USE OF NON-ORIGINAL PARTS.**

For further information  
[europe.thermoking.com](http://europe.thermoking.com)

Find your nearest dealer on  
[dealers.thermoking.com](http://dealers.thermoking.com)